

Baolifeng (BLF) Tools Co., LTD

www.blf-tools.com

ZC0, ZY0, ZH0, CY0, FK0, CP0 series hydraulic crimping tools

- Crimping is application to terminals' specifications such as DIN, AWG, JIS
- With two stages of high and low pressure, when the safety protection device with "crack" sound will be finished operating.
- One person can work high above the ground, saving time and labor.
- With conjoined design of pump body, pressing head part can rotate at 180 degrees of angle.



Model: **ZC0-400**

- Crimping range (mm²)-AL Terminal:10-300
- Crimping range (mm²)-CU Terminal:16-400
- Crimping force:12
- Stroke (mm):32
- Weight (kg):6.5
- Standard dies(mm²):50,70,95,120,150,185,240,300,400
- Packing&Size (mm):545*130*235
- Type: Hexagon



Model: **ZY0-400**

- Crimping range (mm²)-AL Terminal:10-300
- Crimping range (mm²)-CU Terminal:16-400
- Crimping force:12
- Stroke (mm):16
- Weight (kg):5.5
- Standard dies(mm²):50,70,95,120,150,185,240,300,400
- Packing&Size (mm):545*130*235
- Type: Hexagon



Model: **CY0-300C**

- Crimping range (mm²)-AL Terminal:10-240
- Crimping range (mm²)-CU Terminal:16-300
- Crimping force:12
- Stroke (mm):30
- Weight (kg):6.2
- Standard dies(mm²):50,70,95,120,150,185,240,300
- Packing&Size (mm):545*130*235
- Type: Hexagon

- Crimping is application to terminals' specifications such as DIN, AWG, JIS
- With two stages of high and low pressure, when the safety protection device with "crack" sound will be finished operating.

- One person can work high above the ground, saving time and labor.
- With conjoined design of pump body, pressing head part can rotate at 180 degrees of angle.



Model: **ZCO-300**

- Crimping range (mm²)-AL Terminal:10-240
- Crimping range (mm²)-CU Terminal:16-300
- Crimping force:10
- Stroke (mm):30
- Weight (kg):5
- Standard dies(mm²):16,25,35,50,70,95,120,150,185,240,300
- Packing&Size (mm):545*130*235

• Type: Hexagon



Model: **ZHO-240**

- Crimping range (mm²)-AL Terminal:10-185
- Crimping range (mm²)-CU Terminal:16-240
- Crimping force:10
- Stroke (mm):16
- Weight (kg):4.5
- Standard dies(mm²):16,25,35,50,70,95,120,150,185,240
- Packing&Size (mm):545*130*235

• Type: Hexagon




Model: **ZHO-300**

- Crimping range (mm²)-AL Terminal:10-240
- Crimping range (mm²)-CU Terminal:16-300
- Crimping force:10
- Stroke (mm):16
- Weight (kg):4.5
- Standard dies(mm²):16,25,35,50,70,95,120,150,185,240,300
- Packing&Size (mm):545*130*235

• Type: Hexagon

• **Hydraulic Crimping Tools With hexagonal dies for non-insulated terminal**

- With two stages of high and low pressure, when the safety protection device with "crack" sound will be finished operating.
- One person can work high above the ground, saving time and labor.
- With conjoined design of pump body, pressing head part can rotate at 180 degrees of angle.

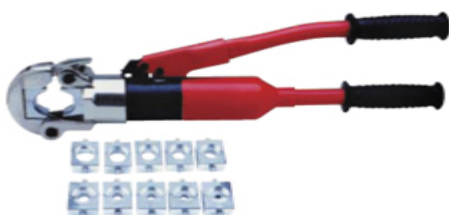

Model: **FKO-240A**

- Crimping range (mm²)-AL Terminal:10-185
- Crimping range (mm²)-CU Terminal:16-240
- Crimping force:10
- Stroke (mm):16
- Weight (kg):4.8
- Standard dies(mm²):16,25,35,50,70,95,120,150,185,240

- Packing&Size (mm):545*130*235

- Type: Hexagon



Model: **CPO-150S**

- Crimping range(mm²)-AL Terminal:8-100

- Crimping range(mm²)-CU Terminal:14-150

- Crimping force:10

- Stroke (mm):14

- Weight (kg):4.8

- Standard dies(mm²):male die 8-38 60-100 female die 14-22
38-60 70-80 100-150

- Packing&Size (mm):545*130*235

- Type: Point crimping

blf-tools.com